



DJD0120 Wireless Indoor Siren




Features

The DJD120 wireless indoor siren is an accessory of MatiGard® series smart alarm system. When connected to the system and an alarm occurs, it will sound to deter crime effectively.

Parameters

• Working Voltage	DC 12V
• Working Current	≤270mA
• Standby Current	≤29mA
• Maximum Siren Volume	85 dB/3m
• Transmission Distance	Without obstacle 100m
• Transmission Frequency	433.29MHz
• Working Temperature	-20°C~50°C
• Humidity	≤90%rh (non-condensing)
• Weight	103.5g
• Dimension	121mm*72mm*42mm (L*W*H)

Appearance

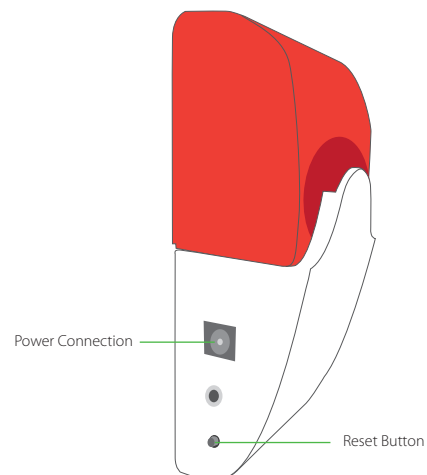

Operating Instructions

1. Scan the QR code printed on the siren.
2. The siren would beep twice. The pairing result would be confirmed by SMS sent from main panel.

NOTE: Both main panel and siren should be powered on during the pairing procedure.

Function Clarification

After successfully paired with main panel, the siren's sound would follow the status of main panel.

NOTE: There is no LED indicator on this model of siren.

Main panel status	Horn Status	Interval Time of Sound	Sound Frequency
<i>Disarm</i>	Beep 2 times	150ms	1kHz
<i>Arm</i>	Beep 3 times	150ms	1kHz
<i>Home Arm</i>	/	/	/
<i>SOS</i>	Alarm sound	/	/

Accessories

1. Power supply: 1x 5.5mm DC Output: 12V=1A
2. 2 × screws;
3. 2 × plastic screw bolt.